
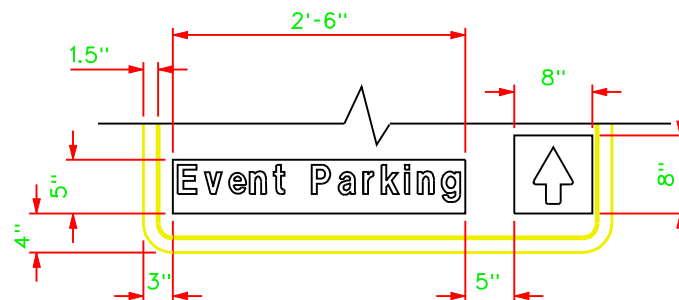
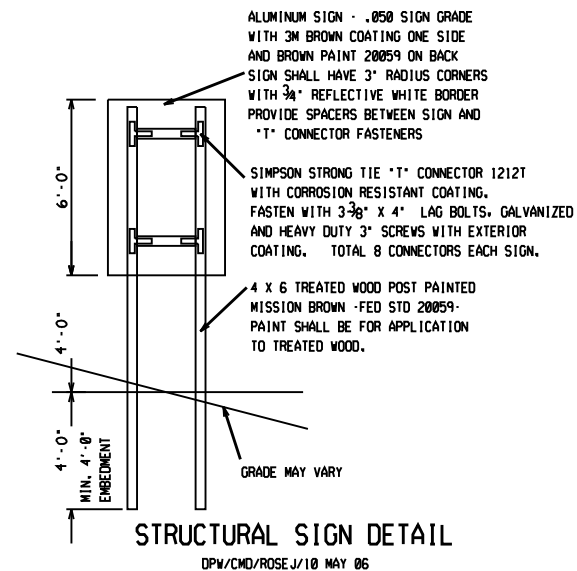
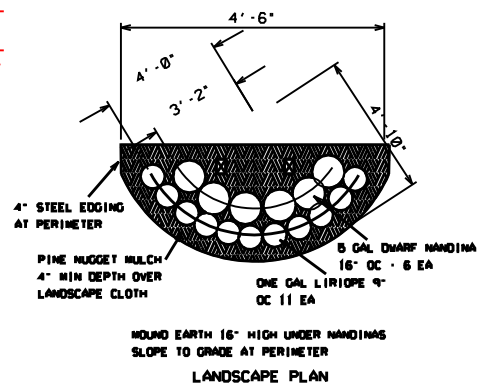


4.2 SIGN DETAIL


SCALE 2" = 1' - 0"

NOTES:

1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 16" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.



PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.




DIRECTORATE OF PUBLIC WORKS
FORT BRAGG, NORTH CAROLINA

FORT BRAGG
DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

SCALE: SIGN DETAILS 11 MAY 06
SHEET 7 OF 7
PW- 6880

CAD FILE NAME AND OR NUMBER



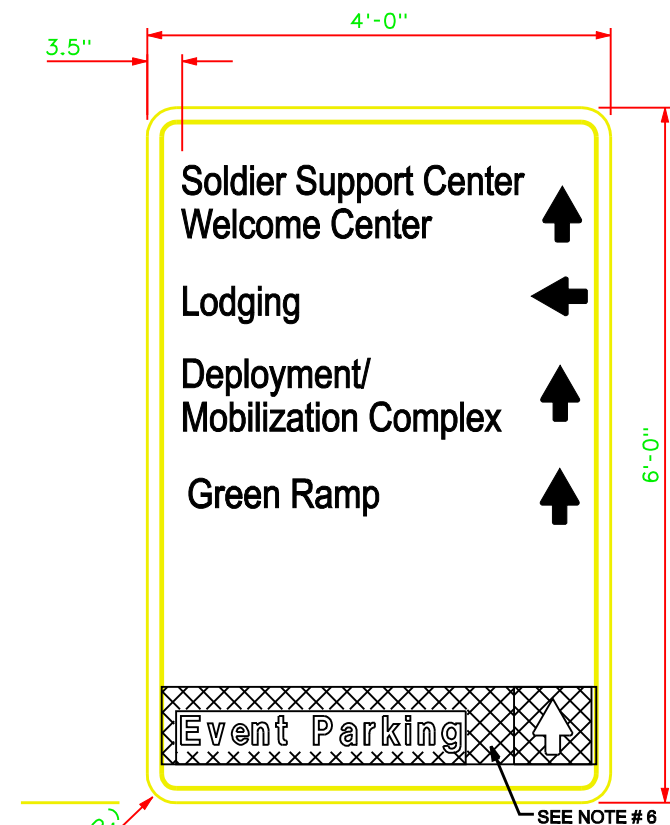


4.3 SIGN DETAIL


SCALE 2" = 1'-0"

NOTES:

1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 16" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMUTCD DRAWING 603.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.

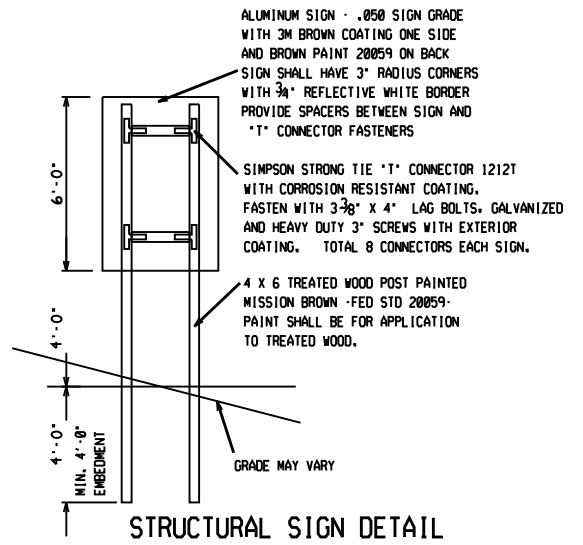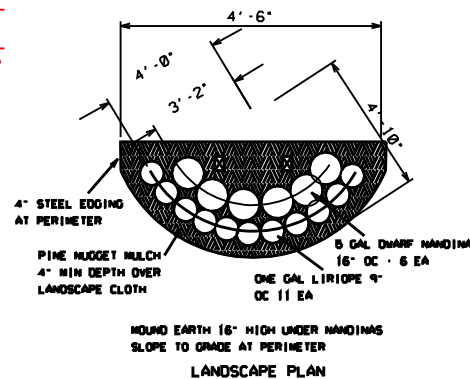

DPW/CMD/ROSE/J/10 MAY 06

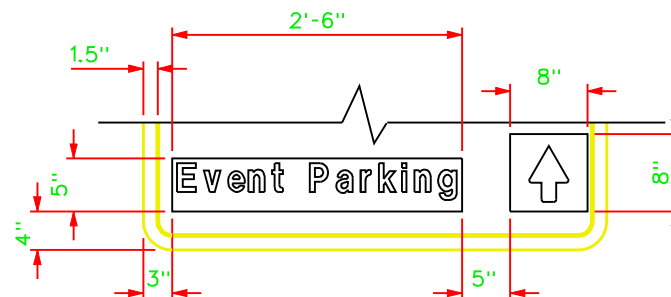


PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

SIDE VIEW

DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
SIGN DETAILS	DATE: 11 MAY 06
DESIGNED BY: PW-6660	CHECKED BY: PW-6660
DRAWING NUMBER: PW-6660	
SHEET 7 OF 7	

END FILE NAME AND BY NUMBER

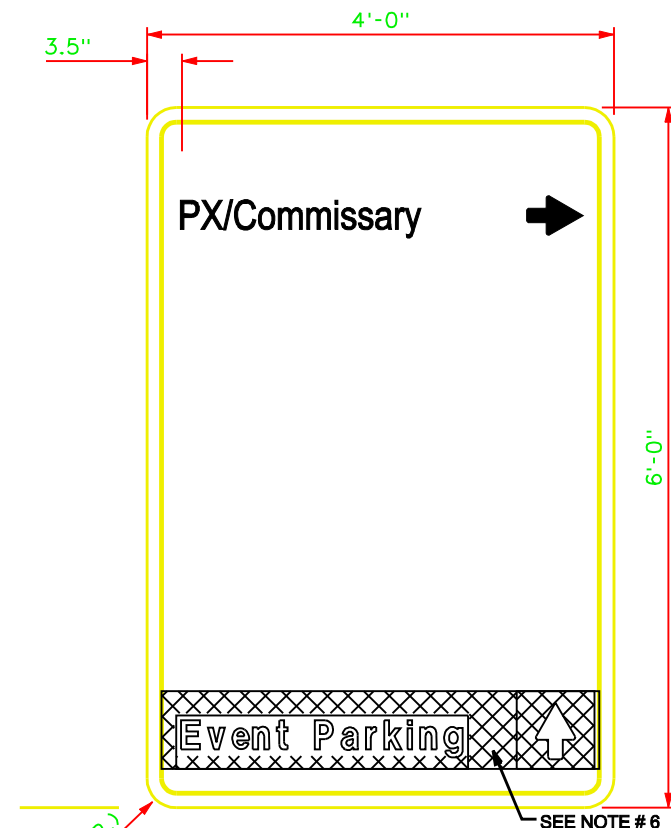


4.4 SIGN DETAIL


SCALE 2" = 1'-0"

NOTES:


1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NC MUTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.




ARROW DETAIL
NTS

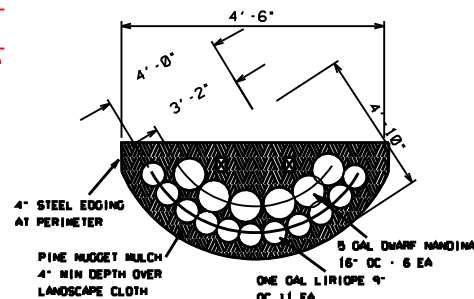

LANDSCAPE PLAN
MOUND EARTH 16" HIGH UNDER MANDARINS
SLOPE TO GRADE AT PERIMETER

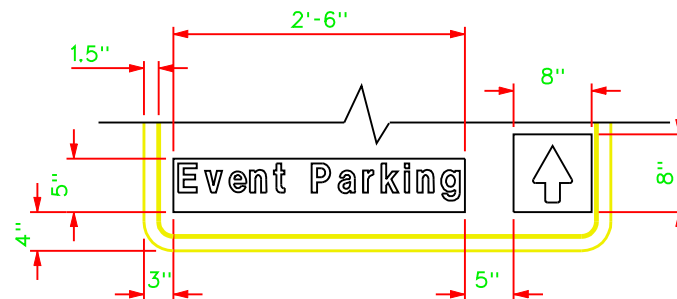

SIGN INSERT DETAIL
NTS

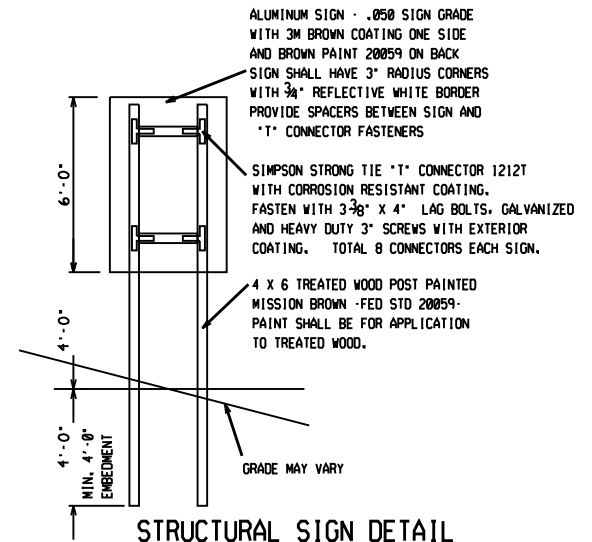

STRUCTURAL SIGN DETAIL

DPW/CMD/ROSE/J10 MAY 06

PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

SIDE VIEW

DIRECTORATE OF PUBLIC WORKS
FORT BRAGG, NORTH CAROLINA

FORT BRAGG
DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

DATE
11 MAY 06

SIGN DETAILS

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

PROJECT: PW-6680

SHEET 7 OF 7

END FILE NAME AND OR NUMBER

